



YOUR PARTNER FOR
SOLID WASTE SOLUTIONS

ADDENDUM 2

Date: August 31, 2011

Bid No.: SWA 12-05/PF

Title: Woody Waste Grinding Services


BID RETURN DATE: SEPTEMBER 7, 2011, NO LATER THAN 2:00 PM

The purpose and intent of this addendum is to revise the subject solicitation as follows:

- **REPLACE PAGES TEC-1 of 4 through TEC-4 OF 4 WITH THE REVISED PAGES TEC-1 OF 4 THROUGH TEC-4 OF 4, ATTACHED HERETO.**

FAILURE TO ACKNOWLEDGE RECEIPT OF THIS ADDENDUM MAY RESULT IN REJECTION OF YOUR BID.


Signature



Phillip Ford, CPPO, CPPB
Purchasing Supervisor

Company

Title

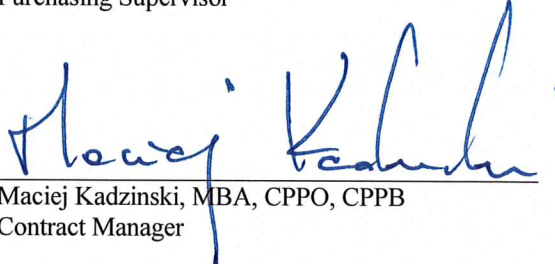

Maciej Kadzinski, MBA, CPPO, CPPB
Contract Manager

Date

REVISED TECHNICAL SPECIFICATIONS

WOODY WASTE GRINDING SERVICES

SWA Bid No: 12-05/PF

Scope of Work

Materials: The materials to be processed will include, but are not limited to, woody waste materials delivered to the Solid Waste Authority's North County Regional Solid Waste Disposal Facility located at North Jog Road and 45th Street, West Palm Beach, Florida. Woody waste materials are received at the landfill as a separate waste type and are substantially comprised of lawn clippings, trimmings, branches, limbs, palm fronds, logs, and stumps.

Unprocessable Materials: Woody waste materials may contain minor amounts of debris such as rock, metal, or other items which may be damaging or harmful to wood grinding or processing equipment. Although the Authority will inspect incoming loads and provide general separation and stockpiling activities, the Contractor is responsible for the separation of potentially damaging materials and is responsible for any and all damage resulting to Contractor's equipment resulting from the introduction of any materials into Contractor's equipment.

Material Quantities: A minimum of approximately 15,000 yards or 2,500 tons will be available for processing by the Contractor each time processing services are requested by the Authority. There is no guarantee of any minimum number of processing services requests during the term of this contract.

Authority Responsibilities: The Authority will visually inspect all incoming loads of woody waste to ensure that the material is substantially free of contamination. The Authority will stockpile the incoming material into rectangular stockpiles. These Authority separation activities are intended to be a visual inspection only and in no way limit Contractor's responsibilities for the separation and removal of unprocessable materials.

Processing Area: The regular processing area is located within the Authority's North County Regional Solid Waste Disposal Facility located at the corner of North Jog Road and 45th Street in West Palm Beach, Florida. The Authority reserves the right to set up a remote location within the County or change the process area from time to time provided adequate space and safety requirements can be maintained.

Specification Changes: The Authority reserves the right to renegotiate agreement terms and conditions with the existing Contractor if, in the future, the technical specification requirements are changed due to the needs and best interest of the Authority.

Bidder (Company) _____

SWA Bid No. 12-05/PF

Signature _____

REVISED TEC-1 of 4

Scope of Services:

1. Three (3) options shall be bid.
 - a. Grinding Only
The Contractor will utilize 5" round or a 4" square grate that is properly maintained. The Authority will be allowed to periodically inspect the grate to verify an acceptable condition. The Contractor is required to keep his equipment in proper repair in order to maintain product specification. The Authority reserves the right to halt production or refuse to accept materials produced that do not meet these requirements.
 - b. Screening Only
The Contractor shall screen all ground material through a 1.5 inch screen.
 - c. Grinding and Screening
Both processes are utilized.

2. The Contractor is required to provide all equipment and manpower necessary to mulch and if needed screen woody waste and handle both unprocessed and processed material. This includes :
 - a. Certified documented machine to grind a minimum average processing rate of 60 tons per hour grinding or screening.
 - b. Site equipment sufficient to maintain, sort, move, and stockpile woody waste, mulch, and unprocessibles in process area.
 - c. Grinding equipment provided by the Contractor will be equipped with a magnetic device (permanent head pulley magnet, electromagnet, etc.) to allow for magnetic separation of ferrous materials prior to stockpiling of finished product. Note: All recovered materials shall be the property of the Authority.

- 3. REQUIREMENT DELETED.**

4. The Contractor must provide EPA Engine Certification Form (Tier 1, 2, or 3).

- 5. The responsibility for any air permitting associated with the portable equipment provided as a part of this bid may not be the sole responsibility of the bidder. The successful bidder agrees to cooperate with the SWA in providing technical specifications and information on the engines and projected usage of the portable equipment in order to secure the necessary approvals from the Florida Department of Environmental Protection.**

6. The Contractor is responsible for all repair, maintenance, and fuel for the Contractor's equipment.

Bidder (Company) _____ **Signature** _____
SWA Bid No. 12-05/PF REVISID TEC-2 of 4

7. The Contractor will operate his loading or materials handling equipment in such a manner as to minimize the amount of sand or dirt in the finished product and avoid introducing such materials into the woody waste and mulch.
8. Unprocessable materials such as rock, metal, brick, and other non-woody materials will be stockpiled by the Contractor in manageable piles in an area adjacent to the processing area designated by the Authority.
9. The Contractor will place all finished mulch in a stockpile in an area adjacent to the processing area as designated by the Authority.
10. All work will be performed during regular operating hours. Excluding holidays, regular operating hours are 7:00 a.m. to 5:00 p.m., Monday through Saturday. The Authority reserves the right to adjust, change, or amend its hours of operation. The Contractor may be allowed to operate outside of regular operating hours only with advance permission.
11. The Contractor will provide experienced employees who are knowledgeable in standard operation, maintenance, and coordination at all times. The supervisor will be a competent English-speaking person who, in the Contractor's absence, shall be fully authorized as the Contractor's agent.
12. The Contractor shall comply with all applicable local, federal, state, and Authority health, safety, and environmental requirements.
13. The Contractor shall arrange for access to Authority property with the Director of Compost Services.
14. Portable sanitary facilities are available on site for the use of the Contractor's personnel. The Contractor may provide additional facilities at Contractor's option and expense if so desired.

Scheduling Work: Normal Services

1. The Contractor shall begin work within seven (7) days written notice by the Authority to the Contractor.
2. The Contractor shall remain on site until all material in the unprocessed stockpile at the time of arrival on site is processed. Upon arrival on site, an Authority representative will identify the pile or piles to be processed. The Contractor and the Authority will agree upon the quantity of material in the stockpile to be processed and for which payment will be made.
3. In the event of a natural disaster and at the Authority's discretion, the Contractor shall provide "Additional Services - Emergency Processing" to the Authority.

Bidder (Company) _____ **Signature** _____
SWA Bid No. 12-05/PF REVISED TEC-3 of 4

ADDITIONAL SERVICES – EMERGENCY PROCESSING

In the event of a natural disaster and at the Authority’s request, the Contractor shall provide “Additional Services” at a rate that is equal to 100 percent of this Agreement’s “Normal Services” rate.

The Authority reserves the right to hire additional contractors to perform emergency processing.

REMAINDER OF PAGE INTENTIONALLY LEFT BLANK